

Genova Solid Vinyl Drip Edge

This solid vinyl drip edge is designed for use on roofs which do not have sufficient overhang to direct rainwater into gutters. Proper installation of this product is essential for its proper functioning. Please follow instructions carefully. Genova's vinyl drip edge is available in white and brown.

Easy to Install

Just like Raingo® gutters, this Drip Edge is a snap to install. Easy to follow instructions are on the preceding pages.

Most Durable

Genova's durable Drip Edge holds its own in all kinds of weather conditions. The extreme heat or cold will not disturb this heavy duty PVC Drip Edge.

No Sharp Edges

Genova's Drip Edge is a lot easier to handle without having to wear protective gloves than its metal counterpart. Shop and compare!

Genova Products, Inc.
7034 East Court Street, Box 309
Davison, Michigan 48423-0309

Form No. 252213

DRIP EDGE



- **Maintenance Free**
- **Easy Installation**
- **Directs rain water from the roof into the gutter**

For use with all gutter systems

Genova
PRODUCTS

Lap Joint Instructions:

Because vinyl expands with changes in temperature, it is important that installed vinyl drip edge is free to move longitudinally. Preparing the overlapping ends of the drip edge as shown will insure freedom of movement and prevent distortion.



Photo 1:
Using a pair of tin snips, remove a 2" piece of the downward flange from the end of the top piece of Drip Edge to be overlapped.

Photo 2:
Carefully remove a 2½" piece of the drip lip from the end of the same piece of Drip Edge, using a utility knife.



Photo 3:
Overlap the Drip Edge 1" to allow for expansion and contraction.


Photo 4:
It's time to install your Drip Edge. Mounting instructions are explained on the following page.



Mounting Instructions:

Genova's Drip Edge must be properly positioned on the roof edge in order to work effectively with Raingo® gutters, or any other gutter system. For existing roofs, simply raise the bottom course of shingles enough to insert the drip edge between the roof felt and the shingle. Position the downward flange tight against the fascia. The unique "Drip Lip" prevents rainwater from approaching the fascia due to capillary action and assures that all rain water is directed into the gutter system.

On new roofs, it may be desirable to anchor each length of vinyl Drip Edge into position with a single nail through the mounting slot provided in the center of each length. Be sure that each end of Drip Edge is properly overlapped (see facing page) so that its longitudinal movement is unrestricted. **Only use the nail hole provided and make sure the nail is centered in the hole for proper expansion and contraction. DO NOT NAIL TIGHTLY. DO NOT NAIL DIRECTLY THROUGH VINYL.**

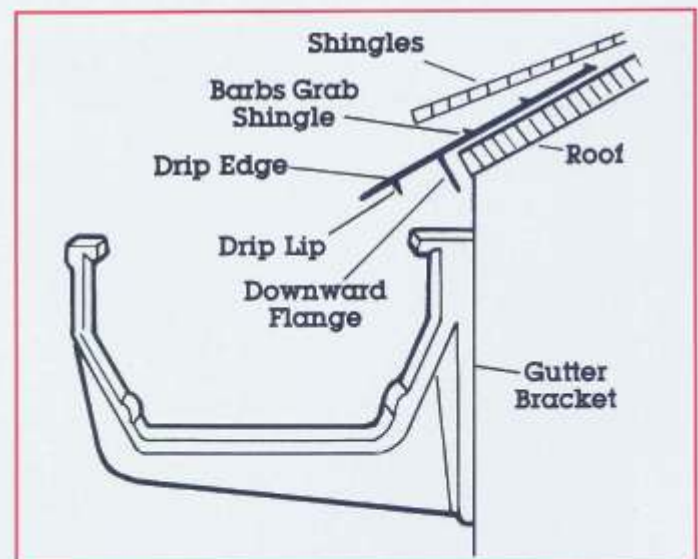

Note: Be sure the drip edge extends about ½" beyond the shingles as shown above.